WELCOME

Thank you for buying the MM03i handset, you will love this new experience.

For the most updated information, be sure to check our website at www.nativeunion.com

WHAT YOU GET IN THIS PACKAGE

1. MM03i *Bluetooth*® wireless handset
2. MM03i base
3. One Multi-country AC adaptor with wire and micro USB with 4 exchangeable adaptor plugs for Europe, UK, North America, Asia and Australia.
4. Micro-USB / USB Cable
5. Instruction Manual
6. Two universal dock adaptors for iPhone® 3GS and iPhone® 4

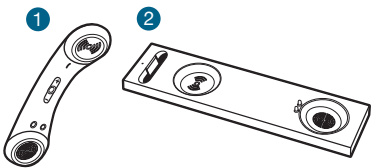

LOCATION OF CONTROLS

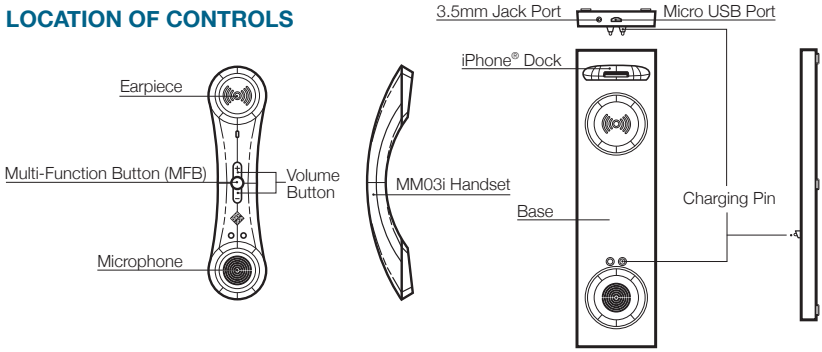

How to use the MM03i:

PLEASE READ THESE INSTRUCTIONS CAREFULLY before using your new handset

IMPORTANT SAFETY INSTRUCTIONS READ BEFORE OPERATING EQUIPMENT
This product was designed and manufactured to meet strict quality and safety standards. There are, however, some installation and operation precautions which you should be particularly aware of :

1. Read these instructions.
2. Keep these instructions.

3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat
8. Only use attachments/accessories specified by the manufacturer.

Please check the “Location of controls” section to locate and identify functional buttons.

CONNECTING YOUR MM03i TO YOUR iPHONE® (OR ANY *BLUETOOTH*® WIRELESS TECHNOLOGY MOBILE PHONE.)

STEP 1

CHARGE YOUR MM03i HANDSET

a. Connect the AC adaptor provided to the MM03i base.



b. Plug the AC adaptor into a power outlet.



c. Finally, place the MM03i handset in the charging base to charge the battery*

* The MM03i comes with a build-in rechargeable battery. It takes two or three hours to fully recharge the battery.



The white LED on the base is a charging indicator.
It will turn on when the handset is placed on the base for charging, and turn off when it is fully charged.



When your MM03i handset has low battery, the red LED of the handset will start blinking and it will play low battery alert tone every minute. Place the handset back to the base to charge it.



NOTE :
You can also use the Micro-USB/USB cable provided to connect your MM03i base directly to the USB port of your computer to recharge the handset.
Depending on the computer, the charge time may vary. Please find the computer charging sequences below :

- If your computer supply enough power : the iPhone® and the MM03i will be charged simultaneously.
- If your computer cannot supply enough power : the iPhone® will be charged first, and the handset will start charging once the iPhone® is fully recharged.

STEP 2

TURN YOUR MM03i HANDSET ON
To turn on your MM03i, you must press and hold the MFB button for 2 seconds.

When your MM03i is on, you will hear a sound and the blue LED will turn on.



STEP 3

TURN YOUR MM03i HANDSET OFF
To turn off your MM03i, you must press and hold the MFB button for 2 seconds.

When your MM03i is off, you will hear a sound and all LED will turn off.



STEP 4
PAIRING THE MM03i HANDSET WITH YOUR iPHONE® (OR ANY *BLUETOOTH*® WIRELESS TECHNOLOGY MOBILE PHONE.)

First of all, you must make sure that your mobile phone has *Bluetooth*® Wireless capability. If you are not sure whether it does, please consult your mobile phone's user manual.

IMPORTANT : Please note that your MM03i must be powered off before starting the pairing process.

a) To pair your MM03i handset with your mobile phone, you must press and hold the MFB button for 5 seconds, until you hear a sound and see the red and blue LED flashing alternately.
Your MM03i handset is now ready to be paired.

b) Make sure the *Bluetooth*® Wireless function is activated on your mobile phone, and instruct your mobile phone to search for new *Bluetooth*® devices. (check the user's instructions of your mobile phone if you need more information)





c) Place your MM03i handset within 1 meter away from your mobile phone.

d) Your mobile phone should search for all *Bluetooth*® devices and the name “MM03i” should appear on the *Bluetooth*® device list.

e) Select “MM03i” and enter “0000” if a password is required.

The MM03i will make a sound and the blue LED will light on, indicating the pairing process is now completed and the mobile phone is connected.
You will also see a white LED appearing on the back of the handset. This LED is a visual indication to tell you that the MM03i is now connected with your mobile phone.

Note :
Some phones will connect to the MM03i automatically.
If your phone prompts you to confirm whether you want to connect to the MM03i, accept the connection request. If your phone does not connect to the MM03i then use your mobile phone’s Bluetooth menu to initiate a connection manually.

If you have connected the MM03i with an iPhone®, a MM03i battery icon will appear on your phone’s taskbar indicating the current battery level of the MM03i handset.
You can use now your MM03i !

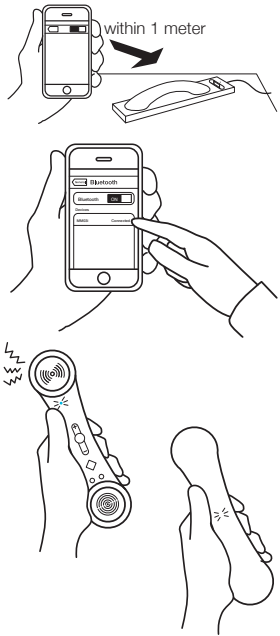

ATTENTION : The *Bluetooth*® Wireless technology signal reception works up to a 10m range (open area). If your mobile phone moves out of range, the MM03i will be automatically disconnected. The white LED on the handset will turn off to indicate disconnection.

CHARGING YOUR iPHONE®

Place your iPhone® in the dedicated iPhone® dock located on the MM03i base.
Your iPhone® will be charged in both power on and power off modes until it is fully charged. To recharge your iPhone®, the AC adapter must be connected to the MM03i base.



PLAYING MUSIC THROUGH EXTERNAL SPEAKERS OR A STEREO VIA THE 3.5MM LINE-OUT PORT

Using the MM03i base, you can play music from your iPhone® through external speakers or a stereo receiver. You need an audio cable (available separately) with a standard 3.5 millimeter stereo plug (many external speakers use this type of cable).

1. Place your iPhone® in the MM03i base dock.
2. Connect the speakers or stereo to the 3.5mm line out port.
3. Use the iPhone® controls to play music.

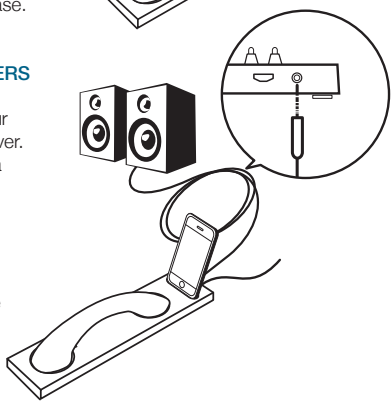

USE YOUR MM03i WITH YOUR iPHONE® (OR ANY OTHER *BLUETOOTH*® WIRELESS TECHNOLOGY MOBILE PHONE)

MAKING A CALL

To make a call with your MM03i, simply dial the number on your mobile phone keypad as you normally would. When the call connects, you will now speak and listen through the last active call device, whether it is the MM03i or your mobile phone.
If you wish to swap the call between MM03i and your mobile phone, press and hold the volume control '+' button for 2 seconds, or alternatively, select from your mobile phone interface setting.

ANSWERING AN INCOMING CALL

To answer a call on your MM03i, simply pick up the handset from the base and the call will be connected on the MM03i automatically. If the handset is not on the base at the time of the call, press the MFB button once to answer the call. To answer the call directly on your mobile phone, simply answer by using your mobile phone interface.

If you wish to swap the call between MM03i and your mobile phone, press and hold the volume control '+' button for 2 seconds, or alternatively, select from your mobile phone interface setting.

DISCONNECTING A CALL

To hang up a call on your MM03i, simply place the handset back on the base or press the MFB button once.

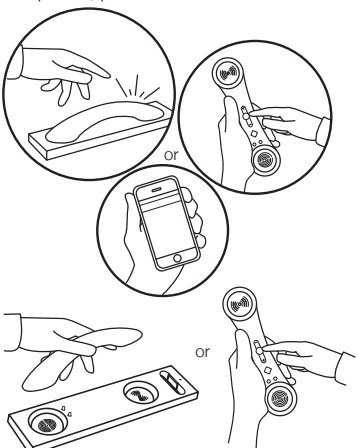

INFORMATION: MM03i enables a *Bluetooth*® connection to stay paired even if the MM03i handset or the mobile phone is switched off and on again. Please also note that MM03i can memorize up to 4 devices. This feature allows *Bluetooth*® re-connection when either one of the Bluetooth device is switched off and on again.
MM03i will auto-reconnect to the last connected device. If last connected device is not available, it will try to connect to the next device on the list.

OTHER FUNCTIONS OF THE MM03i HANDSET

SYNCING YOUR iPHONE®

Your MM03i can also synchronize your iPhone® with your computer :

a) Unplug the AC adaptor from the power outlet and disconnect the cable from the MM03i base
b) Plug the Micro-USB / USB cable into the MM03i base and USB port of your computer accordingly.
c) The synchronization process between your computer and your iPhone® will automatically start whenever your iPhone® will be docked.

REJECTING INCOMING CALLS

To reject a call on your MM03i, press and hold the MFB button for 2 seconds.

VOLUME CONTROL

During a call, to adjust the volume on your MM03i, simply press the volume control '+' button to increase the volume or '–' button to decrease it.

REDIAL LAST NUMBER

To redial the last number called on your MM03i, double press the MFB button.

END ACTIVE CALL AND ACCEPT WAITING CALL

During a call, to end the active call and accept the waiting incoming call on your MM03i, press the MFB button once.

HOLD ACTIVE CALL AND ACCEPT WAITING CALL

During a call, to hold your active call and accept the waiting incoming call on your MM03i, double press the MFB button. Please do the same again if you want to switch between the two calls.

VOICE ACTIVATED DIALING

Your MM03i also support "voice activated" dialing with certain models of mobile phones. Before you use this function, you need to set up "voice-tags" on your mobile phone. To find out how to do this, please refer to the instruction manual of your mobile phone.
To make a voice activated call, press and hold the volume control '+' button for 2 seconds. When you hear an alert tone, say the voice tag of the contact.
If your mobile phone has trouble recognizing the voice tag, please repeat the process again.

MUTE

During a call, press volume control '+' and '–' buttons together to mute the microphone. Press again to unmute.

CLEAR PAIRED DEVICE LIST

To clear the list of all paired devices, you will need to perform Factory Reset. To do so, switch off the MM03i place it on the charging base, then press and hold MFB button for 5 seconds while in charging state until you hear an alert tone.

CHOOSE YOUR MM03i RINGTONE

You can define how you want your MM03i to ring on incoming calls. You have a choice of 15 ringtones.

a) To enter the ringtone selection mode on you MM03i, press and hold the volume control '+' and '-' buttons together for 2 seconds. Your MM03i will then play the current ringtone.
b) To go through the ringtone list, press the volume control '+' button to play the next ringtone and press the volume control '-' button to play the previous ringtone.
c) To select the current playing ringtone and leave the ringtone selection mode, press and hold the volume control '+' and '-' buttons together for 2 seconds.
d) The ringtone volume can be adjusted anytime while the MM03i is in standby. Press the volume control '+' button to increase the volume or '-' button to decrease it.

INFORMATION: Please note that the MM03i also enables a *Bluetooth*® connection with any laptop or desktop (Mac or PC) featured with a *Bluetooth*® Wireless Technology (supporting HS or HF profile) to work with Skype, Google Talk or other VOIP services.
To connect your MM03i with your computer, you need to go through the pairing process (please refer to the instruction manual of your computer). Please also see 'PAIRING THE MM03i HANDSET WITH YOUR *BLUETOOTH*® WIRELESS TECHNOLOGY MOBILE PHONE.'

If you experience problem such as hearing the sound coming out from the computer instead of your MM03i, please check that your MM03i has been selected on the “Audio Preferences” of your computer or VOIP software.

AUTOMATIC RECONNECTION

The MM03i is designed to reconnect automatically to the last 2 connected devices in its memory. If you take your mobile phone out of range of the MM03i for more than 30 seconds (without turning the MM03i off), and then come back into range, the MM03i will search for your phone and reconnect automatically within 90 seconds.
If your phone is not one of the last two connected phones, you may have to reconnect to the MM03i using your mobile phone’s Bluetooth menu.
Please note that the MM03i will not reconnect automatically if you have manually disconnected your phone from the MM03i using your phone’s Bluetooth menu. In this case you will need to use your phone’s Bluetooth menu to reconnect.
By default, certain mobile phones will prompt you to confirm whether you want to accept the connection or reconnection when back in range.
If your phone keeps prompting you about the connection to the MM03i, then you should change the security setting on your phone so that it considers the MM03i as a trusted or authorized connection (please check your phone’s user manual)

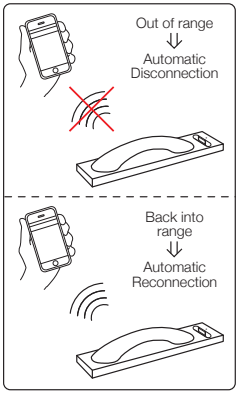

PAIRING AN ADDITIONAL DEVICE

You only need to pair your phone with the MM03i once. Once you have paired your phone with the MM03i they will reconnect to each other in future without you having to repeat the pairing process. If you need to pair an additional phone, simply repeat the process “PAIRING THE MM03i HANDSET WITH YOUR iPHONE® (OR ANY BLUETOOTH® WIRELESS TECHNOLOGY MOBILE PHONE).”

The MM03i can store pairing information for up to 4 Bluetooth devices. If you pair a fifth device, it will replace the stored pairing information for the device that has not been connected to the MM03i for the longest time.

You can connect the MM03i to two Bluetooth devices at the same time. For more information, please see “USING MORE THAN ONE BLUETOOTH DEVICE AT THE SAME TIME (MULTIPOINT).”

USING MORE THAN ONE BLUETOOTH DEVICE AT THE SAME TIME (MULTIPOINT)

The MM03i supports Multipoint technology. This means that you can connect the MM03i with two different mobile phones or Bluetooth devices at the same time. If either phone rings, you can answer it with the MM03i.

If I have two phones paired and connected, which one will be used?

When you have two phones connected to the MM03i:

- You can answer calls received on either phone with the MM03i.
- If you initiate a call through the MM03i (by using the MFB button to either redial the last call or use your phone's voice dial feature), then the call will happen on whichever phone is currently designated as the primary phone. As explained below, this is determined by a combination of connection order and active calls.

Which phone is the primary phone?

The primary phone is either the phone that is connected to the MM03i most recently or the phone that had the last active call:

- When your phones connect to the MM03i, the one that connects last becomes the primary phone.
- Every time you have an active call through the MM03i (incoming or outgoing), the phone with the call becomes the primary phone.
- If both phones go out of range and come back into range together then the primary phone will be whichever one happens to reconnect last with the MM03i.

Setting the Primary Phone

You can force the MM03i to change the primary phone by doing any of the following:

- Answer an incoming call: the phone receiving the call will become the primary phone.
- Initiate a call from one of the phone: the phone making the call will become the primary phone.

Multiple Calls in a multipoint connection scenario

The MM03i does not allow you to call from 2 phones simultaneously. If you receive a call from Bluetooth Device “B” while you are already on an ongoing call on Bluetooth Device “A”, you will hear a special ringtone in the MM03i:

- Press MFB button once to end the current call and accept the incoming call.
- Double press MFB button to hold the current call and accept the incoming call.
- Or do nothing if you want to ignore the incoming call and continue with the current call.

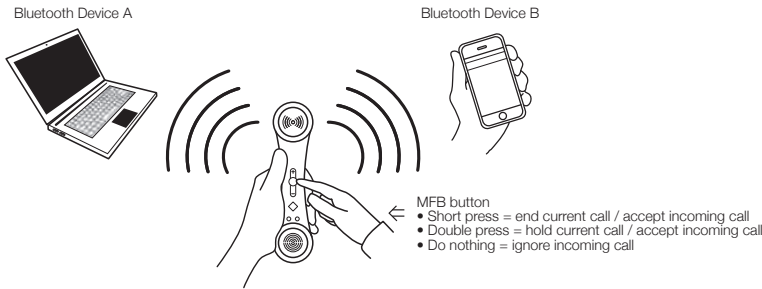
Bluetooth Device A
Bluetooth Device B
MFB button
• Short press = end current call / accept incoming call
• Double press = hold current call / accept incoming call
• Do nothing = ignore incoming call

TROUBLESHOOTING

No connection between your MM03i and your Mobile Phone?
The first thing to do is to make sure that your mobile phone and the MM03i have recognized each other and are properly paired together.
The next thing to check is if the MM03i and your mobile phone are within a 10m range maximum (open area)

Your iPhone® does not fit into the built-in universal dock ?

There might be some obstructions on the dock. Check whether there are any obstructions on the connector and on the dock. If everything is secured, place your iPhone® back into the dock.

Your iPhone® is not charged even though it is in the dock ?

Your iPhone® might not be properly docked. Take your iPhone® out of the dock, and remove any obstructions on the connector from the dock and on your iPhone®. Place your iPhone® back into the dock again.

Your iPhone® is frozen or locked up ?

Check whether your iPhone® operates correctly before placing it back into the dock. Please refer to the owner's instruction manual of your iPhone®.
Remember that your iPhone® will only be charge when the AC adapter is connected to the base.

SPECIFICATIONS

Bluetooth Specs	V2.1 + EDR
Radio Frequency Range	2.4 – 2.4835GHz
Output Power Class	Class 2
Maximum Range (open space)	10 meters
Supported Profiles	HSP, HFP
Type of Battery	Lithium-ion Polymer
Talk Time/ Working Time	Up to 6 hours
Standby Time	Up to 32 hours
Audio Output	0.25W RMS
Power Supply	AC100V-240V, 50/60Hz, 5v/1A
Operating Temperature	0 – 45°C

If you are having any problem getting your MM03i to work, please go to www.nativeunion.com for further information or consult your retailer.
If neither of those solves the problem, please feel free to e-mail us at support@nativeunion.com, and we will do our best to help you.

LIMITED WARRANTY

If the product appears to be damaged or does not function properly, please follow the advice in this booklet.
If you cannot find any solution in this booklet, please go to www.nativeunion.com/support for instructions on how to obtain warranty service.

CE

Regulations According to R&TTE
Declaration of Conformity

Native Union declares that MM03i is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC, in conformity with the following standards:
EN300 328, EN301 489-1, EN301 489-17 and EN60950-1

The declaration of conformity is available at :
Design Pool Limited
Nam Wo Hong Building
148 Wing Lok Street
Sheung Wan, Hong Kong

FCC COMPLIANCE STATEMENT

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions : (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. The manufacturers are not responsible for any radio or TV interference caused by unauthorized modification or incorrect installation to this equipment. FCC ID : X3Q-MM03

FCC NOTICE (USA)

As specified in Part 15 of the FCC Rules, this equipment complies within the limits of a Class B digital device. These restrictions provide sufficient protection against radio and TV interference in residential areas. However, even during normal operation, this device may cause TV or radio interference. In attempting to eliminate some or all interference, you should try one or more of the following corrective measures:

1. Increase the distance between the device and the radio and/or TV
2. Try a different outlet on various electrical circuits for the device, the radio and/or TV.
3. Reposition the receiving antenna

Disposal of old electrical and electronic equipment:
After the implementation of the European Directive 2002/96/EU in the national legal system, the following applies:

Electrical and electronic devices may not be disposed of with domestic waste. Consumers are obliged by law to return electrical and electronic devices at the end of their service lives to the public collecting points set up for this purpose or point of sale. Details to this are defined by the national law of the respective country. This symbol on the product, the instruction manual or the package indicates that a product is subject to these regulations. By recycling, reusing the materials or other forms of utilizing old devices, you are making an important contribution to protecting our environment.

BLUETOOTH

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. And any use of such marks by Native Union is under licence. Bluetooth QDID: B018618

Designed in France by David Turpin
www.nativeunion.com

Spec. is subject to change without prior notice.

© Native Union and Native Union Logo are registered trademarks of Design Pool Ltd
All other trademarks and registered trademarks are the property of their respected owners.

iPhone® is a Trademark of Apple Inc.

Other product and company names mentioned herein may be trademarks of their respective companies.

"Works with iPhone®" means that an electronic accessory has been designed to connect specifically to iPhone® and has been certified by the developer to meet Apple performance standards.
Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.